■ SPECIFICATIONS

- Voltage Rating : 250V AC/DC
- Current Rating : 3A AC/DC
- Withstanding Voltage : 500V AC/minute
- Insulation Resistance : 1000MΩ min
- Temperature Range : - 25℃ to + 85℃
- Contact Resistance : 20mΩ max

■ HOUSING

- Part No. : JS-1101-XX
- Poles : 2~15
- Material : Nylon 66 UL94V-0
- Q ' ty: 1000 pcs./Bag

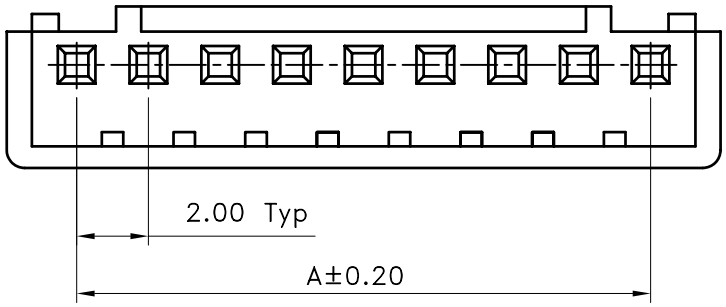

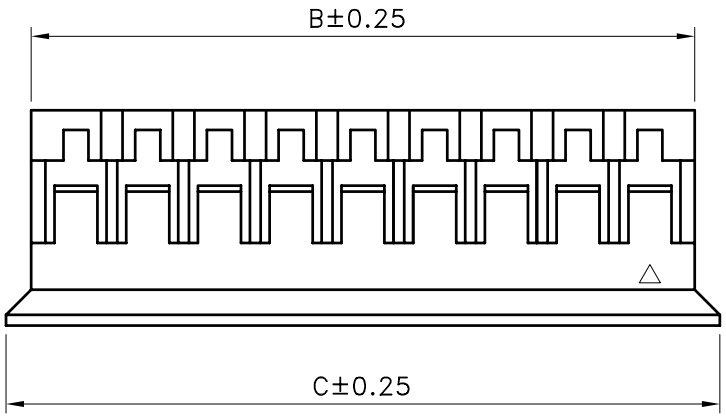

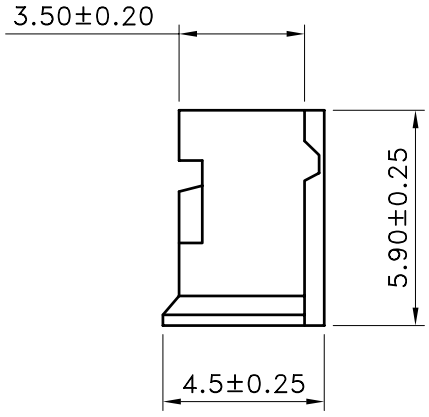

Poles	Part No.	Dimensions (mm)		
		A	B	C
2	JS-1101-02	2.00	4.50	5.60
3	JS-1101-03	4.00	6.50	7.60
4	JS-1101-04	6.00	8.50	9.60
5	JS-1101-05	8.00	10.50	11.60
6	JS-1101-06	10.00	12.50	13.60
7	JS-1101-07	12.00	14.50	15.60
8	JS-1101-08	14.00	16.50	17.60
9	JS-1101-09	16.00	18.50	19.60
10	JS-1101-10	18.00	20.50	21.60
11	JS-1101-11	20.00	22.50	23.60
12	JS-1101-12	22.00	24.50	25.60
13	JS-1101-13	24.00	26.50	27.60
14	JS-1101-14	26.00	28.50	29.60
15	JS-1101-15	28.00	30.50	31.60

喬訊電子工業股份有限公司
CHYAO SHIUNN
ELECTRONIC INDUSTRIAL LTD.

APPROVED BY	SCALE	UNIT
林宗		mm
CHECKED BY	PROJ	VER NO.
		a2
DRAWN BY	DATE	SIZE
黃科源	2008/08/27	A4

TOLERANCE	
.0	±0.3
.00	±0.2
.000	±0.1
ALL	±
ANGLE	
0°	±
.0°	±

LTR	REVISION RECORD	DATE
ECR	RoHS Compliant	06/04/01
ECR	200808-017	08/08/27

LTR	REVISION RECORD	DATE

PART NO JS-1101-XX

2.00mm Crimp Style Connectors Housing

CUSTOMER

Conforms to The RoHS Instruction

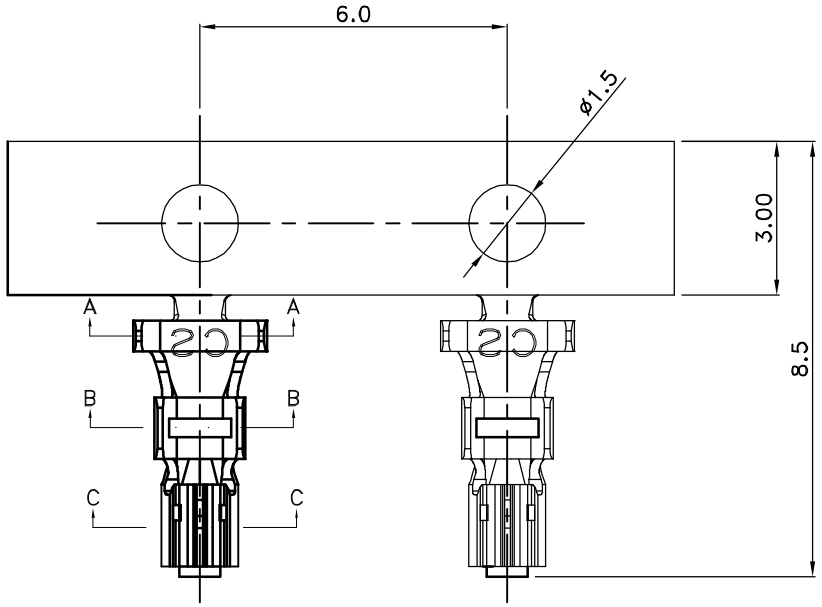

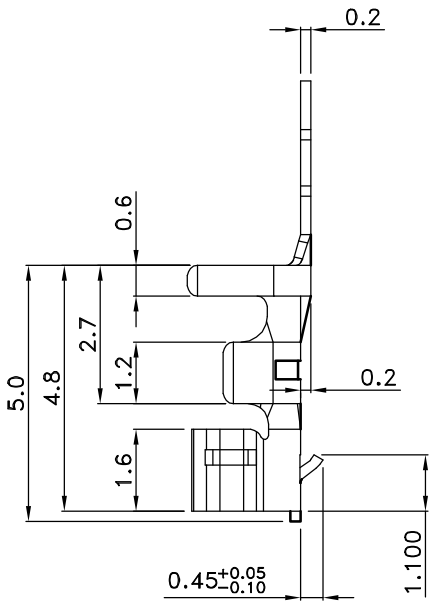

■ SPECIFICATIONS

- Current Rating : 3A AC/DC
- Withstanding Voltage : 500V AC/minute
- Insulation Resistance : 1,000MΩ min
- Temperature Range : - 25℃ to + 85℃
- Contact Resistance : 20mΩ max

■ TERMINAL

- Part No. : JS-1101-TXX
  ①②
  ①Finish : Blank : Tin Plated
  P : Stamping Befor Plated
  G : Glod Flash ⑤
  ②Crimp : Blank : Standard
  H : High Crimp
  L : Low Crimp(L1)
  C : Low Crimp(L2)
- Material : Phos. Bronze
- Thickness : 0.2mm
- Q' ty : 10,000 pcs./Reel

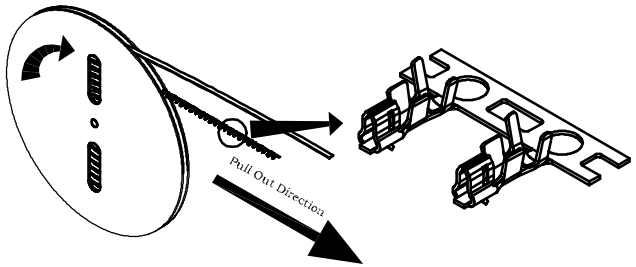



SECTION A–A



SECTION B–B

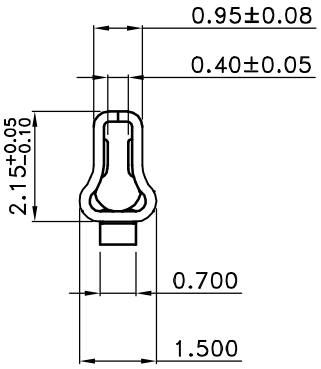

SECTION C–C

④

Crimp	Dimensions (mm)				Applicable Wires
	A	B	C	D	
Blank	2.50	2.70	1.50	1.70	AWG 22~30
H	2.50	2.70	2.05	1.85	
L	2.00	2.10	1.20	1.30	AWG 28~30
C	2.50	2.40	1.50	1.85	AWG 24~30

喬訊電子工業股份有限公司
CHYAO SHIUNN
ELECTRONIC INDUSTRIAL LTD.

APPROVED BY	SCALE	UNIT
Tom Shih		mm
CHECKED BY	PROJ	VER NO.
Erin Chou		a4
DRAWN BY	DATE	SIZE
Eddie	2024/03/07	A4

TOLERANCE		LTR	REVISION RECORD	DATE
.0	±0.3	①	料號整合&尺寸修改	10/07/12
.00	±0.2	②	新增TP規格	11/10/13
.000	±0.1	③	增加電鍍金規格	17/09/22
ALL	±	④	更新規格表敘述	24/03/07
ANGLE				
0°	±			
.0°	±			

LTR	REVISION RECORD	DATE

PART NO JS−1101−TXX

2.00mm Disconnectable Crimp Style Connectors Terminal

CUSTOMER

Conforms to The RoHS Instruction

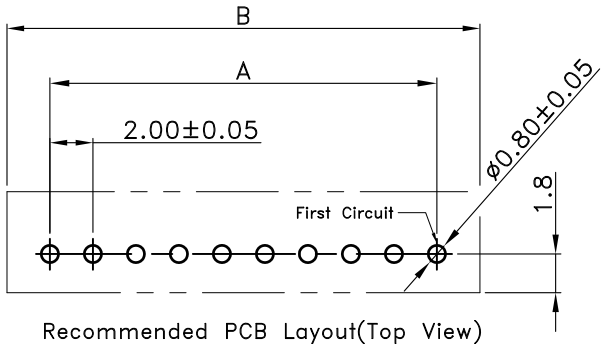

Recommended PCB Layout(Top View)

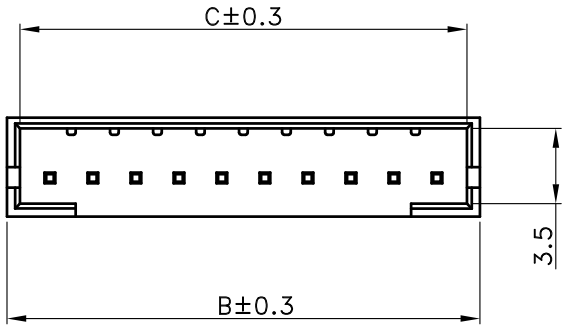

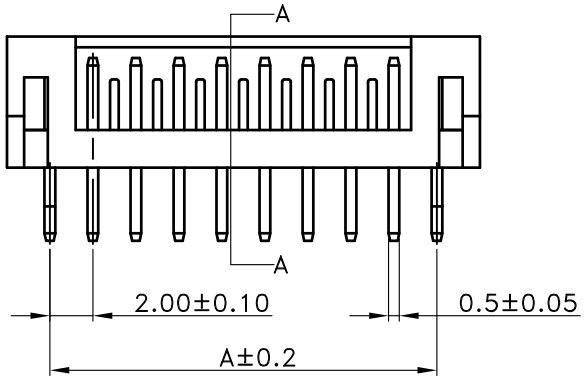







JS-9001-XX ④
SECTION A-A

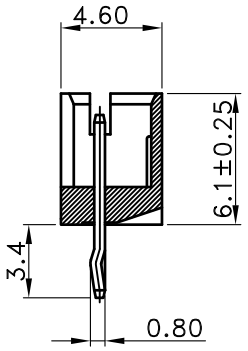

JS-9001-XX(K) ④
SECTION A-A

■ SPECIFICATIONS

- Current Rating : 3A AC/DC
- Withstanding Voltage : 500V AC/minute
- Insulation Resistance : 1000MΩ min
- Temperature Range : - 25℃ to + 85℃
- Contact Resistance : 20mΩ max

■ WAFER

- Part No. : JS-9001-XX (X X) ⑥
  ① ② ③

① Poles : 2 - 15(Sraight)
② Blank : Standard Kink
K : Special Kink
⑥ ③ Blank：Tin Plated
G: Gold Flash

- Material : Contact : Brass, Tin Plated
  ⑤ Base : Nylon 66 UL94V-0,Color：Brown
- Q' ty: 1000 pcs./Bag

Poles	Dimensions(mm)		
	A	B	C
2	2.00	6.00	4.80
3	4.00	8.00	6.80
4	6.00	10.00	8.80
5	8.00	12.00	10.80
6	10.00	14.00	12.80
7	12.00	16.00	14.80
8	14.00	18.00	16.80
9	16.00	20.00	18.80
10	18.00	22.00	20.80
11	20.00	24.00	22.80
12	22.00	26.00	24.80
13	24.00	28.00	26.80
14	26.00	30.00	28.80
15	28.00	32.00	30.80

喬訊電子工業股份有限公司
CHYAO SHIUNN
ELECTRONIC INDUSTRIAL LTD.

PART NO JS-9001-XX(XX)

2.00mm DIP Series Wire to Board Connector Wefer Straight Type

APPROVED BY	SCALE	UNIT
張育瑞		mm
CHECKED BY	PROJ	VER NO.
周家慶		a6
DRAWN BY	DATE	SIZE
鄭小嬌	2015/04/20	A4

TOLERANCE		LTR	REVISION RECORD	NAME	DATE
.0	±0.30	①	ECR RoHS Compliant	佘秀麗	06/04/01
.00	±0.20	②	ECR 200808-017	黃科源	08/08/27
.000	±0.10	③	ECR 200812-019	黃科源	08/12/25
ANGLE		④	區分台北與東莞，打型式	吳沛倫	10/10/22
0°	±1°	⑤	增加塑膠顏色敘述	吳弘文	13/04/01
.0°	±	⑥	增加帶G料號	鄭小嬌	15/04/20
SHEET	1/1	⑦			

LTR	REVISION RECORD	NAME	DATE
⑧			
⑨			
⑩			

CUSTOMER

Conforms to The RoHS Instruction

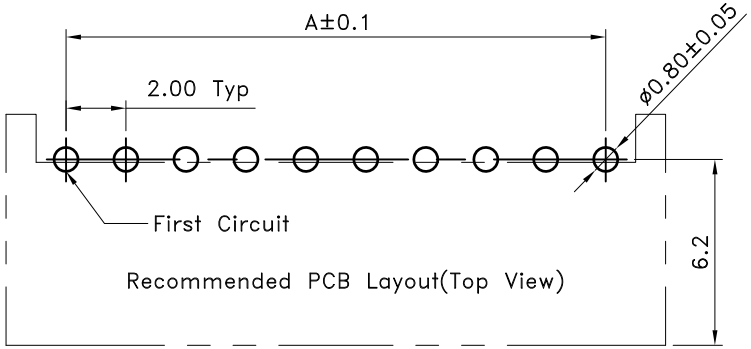

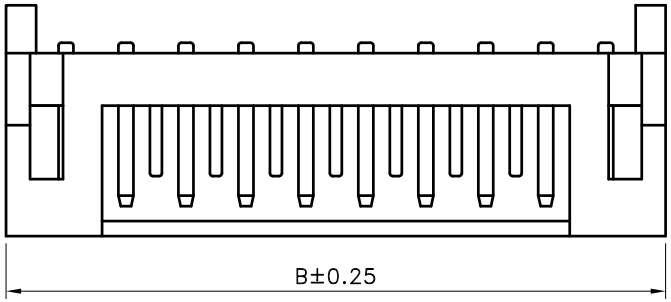

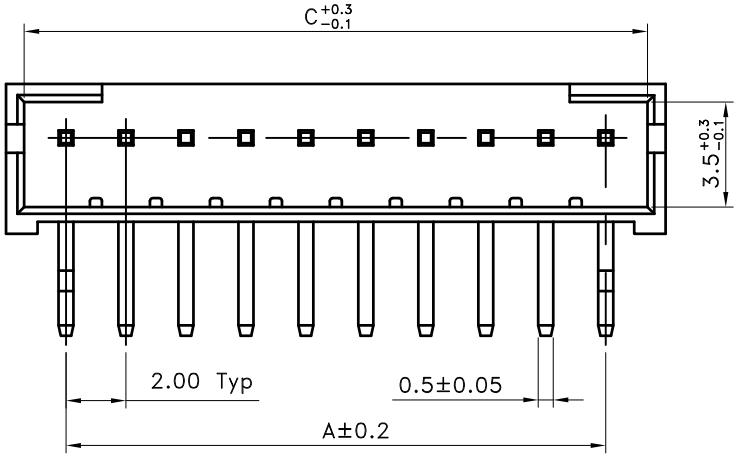

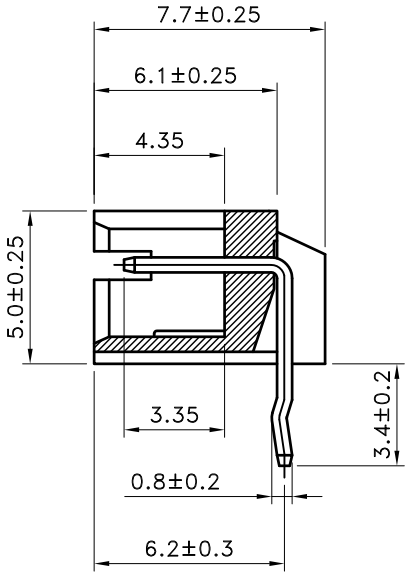

■ SPECIFICATIONS

- Voltage Rating : 250V AC/DC
- Current Rating : 3A AC/DC
- Withstanding Voltage : 500V AC/minute
- Insulation Resistance : 1000MΩ min
- Temperature Range : - 25℃ to + 85℃
- Contact Resistance : 20mΩ max

■ WAFER

- Part No. : JS-9001R-XX
- Poles : 2 - 15(Right Angle)
- Material : Contact : Brass, Tin Plated
  ④ Base : Nylon 66 UL94V-0 ,Color ：Brown
- Q' ty: 1000 pcs./Bag

④ Poles	Dimensions(mm)		
	A	B	C
2	2.00	6.00	4.80
3	4.00	8.00	6.80
4	6.00	10.00	8.80
5	8.00	12.00	10.80
6	10.00	14.00	12.80
7	12.00	16.00	14.80
8	14.00	18.00	16.80
9	16.00	20.00	18.80
10	18.00	22.00	20.80
11	20.00	24.00	22.80
12	22.00	26.00	24.80
13	24.00	28.00	26.80
14	26.00	30.00	28.80
15	28.00	32.00	30.80

喬訊電子工業股份有限公司
CHYAO SHIUNN
ELECTRONIC INDUSTRIAL LTD.

PART NO JS-9001R-XX

2.00mm DIP Series Wire to Board Connector Wefer Right Angle Type

APPROVED BY	SCALE	UNIT
張育瑞		mm
CHECKED BY	PROJ	VER NO.
黃科源		a4
DRAWN BY	DATE	SIZE
吳弘文	2013/03/29	A4

TOLERANCE		LTR
.0	±0.30	①
.00	±0.20	②
.000	±0.10	③
ANGLE		④
0°	±1°	⑤
.0°	±	⑥
SHEET	1/1	⑦

LTR	REVISION RECORD	NAME	DATE
①	ECR RoHS Compliant	佘秀麗	06/04/01
②	ECR 200808-017	黃科源	08/08/27
③	ECR 200812-019	黃科源	08/12/25
④	增加塑膠顏色敘述	吳弘文	13/03/29
⑤			
⑥			
⑦			

LTR	REVISION RECORD	NAME	DATE
⑧			
⑨			
⑩			

CUSTOMER

Conforms to The RoHS Instruction